

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
2 September 2004 (02.09.2004)

PCT

(10) International Publication Number  
**WO 2004/075484 A2**

(51) International Patent Classification<sup>7</sup>: **H04L 12/28**  
(21) International Application Number:  
PCT/US2004/004318

(22) International Filing Date: 13 February 2004 (13.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/448,000 18 February 2003 (18.02.2003) US

(71) Applicant (for all designated States except US):  
**ROAMWARE, INC.** [US/US]; 18900 Stevens Creek  
Blvd., Suite 100, Cupertino, CA 95014-3674 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JIANG, Yue, Jun**  
[GB/US]; 4414 Sugar Maple Drive, Danville, CA 94506  
(US).

(74) Agents: **COURTNEY, Barbara, B.** et al.; Shemwell Gre-  
gory & Courtney LLP, 4880 Stevens Creek Blvd., Suite  
201, San Jose, CA 95129 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished  
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: INTEGRATING GSM AND WIFI SERVICE IN MOBILE COMMUNICATION DEVICES

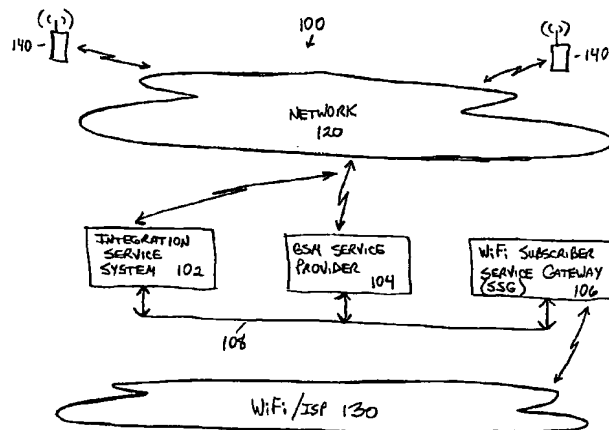

(57) Abstract: A system that integrates Global System for Mobile Communications (GSM) and Wireless Fidelity (WiFi) wireless local area network (WLAN) services is provided. The system couples among components of a communications service provider and a provider of WiFi services to provide integrated cellular communications and wireless fidelity network services to users of mobile devices. The system monitors communications between the service provider and the mobile devices and automatically gathers identification information of the mobile devices. Upon authentication of the mobile devices via an exchange of information among the service provider infrastructures and the mobile devices, the system controls access of the mobile communication devices to WiFi services via the service provider infrastructure using the identification information.

**Integrating GSM And WiFi Service In Mobile Communication Devices**

5

Inventor: Yue Jun Jiang

**RELATED APPLICATION**

This application claims priority from United States Patent Application  
10 number 60/448,000 filed February 18, 2003.

**TECHNICAL FIELD**

The disclosed embodiments relate to portable communication networks and  
devices.

15

**BACKGROUND**

The use of wireless communication devices is ever increasing as a means  
for providing communication services and information to people on the go outside  
the home and office. These wireless communication devices include, for example,  
20 cellular telephones, personal digital assistants (PDAs), satellite telephones,  
portable telephones, Internet telephones, wireless communication devices/radios,  
personal computers (PCs), and similar devices that provide wireless access to voice  
and data communications. As a result of the proliferation of these wireless  
communication devices, numerous voice and data services have been made  
25 available to consumers, many of which are offered under an almost infinite number  
of different service plans provided by a large number of different service providers  
and/or system operators.

As an example, an individual might use a cellular telephone that operates to  
provide wireless access to voice communications and text messages under a Global  
30 System for Mobile Communications (GSM) service plan along with a portable  
computer or PDA that operates to provide wireless access to data via a network  
like the Internet using Wireless Fidelity (WiFi) services and technology provided  
under a different plan and/or service provider. As a consequence of the large  
numbers of services provided by most service providers, there is a need to integrate

access to services like GSM and WiFi to make it easy for subscribers to access and be billed for the services.

Typically the integration of GSM and WiFi wireless local area network (WLAN) (WiFi WLAN) services by a service provider or system operator required the use of a custom client on the user's wireless device, where the custom client is coupled to a physical data Subscriber Identity Module (SIM) card which is a second SIM card of the device. In operation, authentication of the data SIM card was carried out by the client against information of a network signal gateway. The system configuration that supported this integration, therefore, was complex in that it required the use of the second SIM card (the GSM also uses a SIM card) and a complex authentication process involving transactions among the data SIM card, the custom client of the wireless device, a network gateway, and one or more other network components.

The typical GSM and WiFi service integration currently in use has a roaming user entering his/her telephone number during a WiFi login session and, in response to receipt of the telephone number, completes the login process by sending the user a personal identification number (PIN) via the user's mobile device or handset. This approach to service integration, however, results in a billing relationship between the WiFi service provider and the user's home service provider or operator rather than between the WiFi service provider and the visited network service provider in which the user is roaming. Consequently, the current attempts to integrate GSM and WiFi services result in lost revenue opportunities for the network in which the user is roaming.

## BRIEF DESCRIPTION OF THE FIGURES

**Figure 1** is a block diagram of a communication system that includes an integration service system for integrating GSM and WiFi services, under an embodiment.

**Figure 2** is a block diagram of an integration service system, under the embodiment of Figure 1.

**Figure 3** is a flow diagram for advertising WiFi service availability and providing WiFi service information to an inbound roamer, under the embodiments of Figure 1 and Figure 2.

**Figure 4** is a flow diagram for providing WiFi service access information to an inbound roamer, under the embodiments of Figure 1 and Figure 2.

**Figure 5** is a flow diagram for providing WiFi service to an inbound roamer, under the embodiments of Figure 1 and Figure 2.

5       **Figure 6** is a flow diagram for providing accounting information of a WiFi session, under the embodiments of Figure 1 and Figure 2.

**Figure 7**, which is a signal flow diagram for denial of a WiFi service request, under the embodiment of Figure 1.

10       **Figure 8A and Figure 8B** show a signal flow diagram for providing WiFi services to a mobile device, under the embodiment of Figure 1.

In the drawings, the same reference numbers identify identical or substantially similar elements or acts. To easily identify the discussion of any particular element or act, the most significant digit or digits in a reference number refer to the Figure number in which that element is first introduced (e.g., element 15    102 is first introduced and discussed with respect to Figure 1).

#### DETAILED DESCRIPTION

An integration service system is provided that integrates Global System for Mobile Communications (GSM) and Wireless Fidelity (WiFi) wireless local area 20    network (WLAN) services without the need for custom hardware or software on the wireless device. Specifically, the integration service system operates to provide seamless GSM and WiFi services without a custom client on the wireless device and without the need for a second Subscriber Identity Module (SIM) card.

The integration service system along with the associated methods couples 25    among components of a communications service provider and a WiFi service provider to provide integrated cellular communications and wireless fidelity network services to roaming mobile communication devices. The integration service system monitors communications between the service provider and the mobile devices and automatically gathers identification information of the mobile 30    devices. Upon authentication of the mobile devices via an exchange of information among the service provider infrastructure and the mobile devices, the integration service system controls access of the mobile communication devices to WiFi services via the service provider infrastructure using the identification information.

The integration service system described herein provides on-demand access to WiFi services and billing via at least one of a user's cellular telephone bill, credit card, and pre-paid card to name a few. Further, the integration service system eliminates both the need for a custom client and an additional data  
5 Subscriber Identity Module (SIM) card on the mobile device. Consequently, the integration service system also integrates GSM authentication and billing with that of the WiFi WLAN without the use of data SIM card authentication. The integration service system provides simplified authentication under both GSM and  
10 WiFi services by coupling the GSM authentication service with the registration activities of the user with a service provider (also generically referred to herein as Operator X) at the time of WiFi login and or the initiation of a WiFi session, as described below.

The integration service system described below allows the visited network service provider to provide billing and authentication to an inbound roamer. In  
15 particular, the integration service system allows the usage of WiFi service links via the registration of the roaming device with the visited network so to increase possible roaming revenue for the visited network service provider. In operation the roamer requests a PIN from the visited network service provider and authenticates with the WiFi service provided by the visited network service provider. The usage  
20 of WiFi services is continuously synchronized with the registration of the roamer at the visited network service provider, and any de-registration of the roamer with the visited network service provider triggers an alarm that can result in termination of the WiFi session in the absence of a new registration attempt.

The following description provides specific details for a thorough  
25 understanding of, and enabling description for, embodiments of an integration service system for integrating GSM and WiFi services. However, one skilled in the art will understand that the integration service system described herein may be practiced without these details. In other instances, well-known structures and functions have not been shown or described in detail to avoid unnecessarily  
30 obscuring the description of the embodiments of the integration service system.

**Figure 1** is a block diagram of a communication system 100 that includes an integration service system 102 for integrating GSM and WiFi services, under an embodiment. The communication system 100 includes the integration service system 102 coupled among service provider systems that include, for example, a

GSM service provider 104 and/or other cellular service provider (not shown) and a WiFi Subscriber Service Gateway (SSG) 106 of a WiFi service provider, but the embodiment is not so limited. Each of the service provider systems 102, 104, and 106 are coupled for information exchange via network or bus couplings 108, where  
5 the couplings include at least one of wireless, wired, and hybrid wireless/wired couplings/connections. Further, the networks/network couplings 108 can include any of a number of network types known in the art including, but not limited to, local area networks (LANs), metropolitan area networks (MANs), wide area networks (WANs), proprietary networks, backend networks, and the Internet.  
10 Alternative embodiments can include couplings among the integration service system 102 and any number/type/combination of other service providers (not shown) via any number/type/combination of couplings (not shown).

The integration service system 102 and service provider systems 104 and 106 are coupled among a communication network 120 and a WiFi network 130,  
15 but can include any number/combination of additional networks and systems/subsystems (not shown). The communication network 120 and/or the WiFi network 130 and corresponding network couplings include any of a number of network types known in the art including, but not limited to, LANs, MANs, WANs, proprietary networks, backend networks, and the Internet. The  
20 communication network 120 of an embodiment uses at least one of GSM, General Packet Radio Service (GPRS), Code Division Multiple Access (CDMA), and Time Division Multiple Access (TDMA) communication protocols, but is not so limited.

Mobile devices 140 couple to the service provider systems 102, 104, and 106 via the communication network 120. The mobile devices 140 include, for  
25 example, cellular telephones, personal computers, portable computing devices, portable telephones, portable communication devices, subscriber devices or units, and personal digital assistants. The mobile devices 140, also referred to as "mobile communication devices," "portable communication devices" and "communication devices," can include all such devices and equivalents, and are not limited to  
30 communication devices that are wireless. The communication network 120 supports the transfer of information including voice and data signals between the mobile devices 140 and the service provider systems 102, 104, and 106 via at least one of wireless couplings, wired couplings, and a combination of wireless/wired couplings using one or more communication protocols known in the art.

A representative service description is provided below as an example of the integration service system 102 operating to provide integrated Global System for Mobile Communications (GSM) and Wireless Fidelity (WiFi) wireless local area network (WLAN) services to the mobile devices 140. This service description  
5 does not limit the integration service system 102 to this service example.

This service example assumes that a Service Provider, Operator X, offers both GSM mobile services and WiFi services. A user of a roaming mobile device, referred to as a roamer or an inbound roamer, wants to access the Internet via the WiFi services of Operator X. The roamer discovers the WiFi network and is  
10 presented with the home web page ("homepage") of Operator X upon launch of the Internet browser on the mobile device. The homepage includes login options for accessing the WiFi services, where the login options include at least one of user name and password/personal identification number (PIN) login for local Operator X GSM or ISP subscribers, credit card information, and pre-paid card information.

15 For roamers inbound to the Operator X network, components of the Operator X network like the integration service system described above monitor roaming links of the GSM service, tracks the roamer's activities, and send the roamer a welcome SMS message that contains an advertisement for the WiFi services. As an example, an advertisement might include a message as follows:  
20 "Dial "\*WiFi" to have a PIN sent to you in an SMS message to access Operator X WiFi services and get billed on your phone bill with a 10% discount".

If the inbound roamer chooses to access the WiFi services of Operator X using his/her GSM phone number, the roamer registers with Operator X to get a PIN if he/she does not have a current PIN. Upon receipt, the PIN is used to access  
25 the WiFi services. The PIN of an embodiment can be set to provide access for an unlimited period of time. Further, and as a security measure, the PIN can be set to expire using any number/combination of criteria, for example, the PIN expires after a certain amount of time has elapsed, after a pre-specified period of usage, and after a pre-specified period of inactivity. The roamer can dial "\* WiFi" at any  
30 time to change a PIN or if the PIN is lost or forgotten.

Figure 2 is a block diagram of an integration service system 102, under an embodiment. The integration service system 102 includes multiple functions, as described below, that are hosted in and/or distributed across one or more components, systems, and/or algorithms. Components of the integration service

system 102 include at least one of a central server 202, a probe server 204, and a database 206, but are not so limited. Each of the central server 202, probe server 204, and the database 206 are coupled for communication via at least one bus or network coupling 201. The integration service system 102 further includes at least  
5 one of a short message service center 210, an authentication server 212, a charging server 214, and a Call Detail Record/Transfer Accounting Procedure (CDR/TAP) processor 216, but is not so limited.

Various components 201-216 of the integration service system interface with at least one of a Gateway Mobile Switching Center (GMSC) 220, a Visited  
10 Mobile Switching Center (VMSC)/Visited Location Register (VLR) (VMSC/VLR) 230, and a WiFi/Internet Service Provider (ISP) 130, to name a few. Billing services are provided via at least one coupling with an accounting or billing system 240. Note that alternative embodiments of the integration service system 102 can incorporate one or more components/functions of the GMSC 220, the VMSC/VLR  
15 230, the WiFi/ISP 130, and the billing system 240. Operations of the integration service system 102 are described below in further detail.

**Figures 3-6** show flow diagrams 300-600 of operations of the integration service system of an embodiment, and are described in detail below. **Figure 3** is a flow diagram 300 for advertising WiFi service availability and providing WiFi  
20 service information to an inbound roamer, under the embodiments of Figure 1 and Figure 2. **Figure 4** is a flow diagram 400 for providing WiFi service access information to an inbound roamer, under the embodiments of Figure 1 and Figure 2. **Figure 5** is a flow diagram 500 for providing WiFi service to an inbound roamer, under the embodiments of Figure 1 and Figure 2. **Figure 6** is a flow  
25 diagram 600 for providing accounting information of a WiFi session, under the embodiments of Figure 1 and Figure 2. These flow diagrams are described below.

As generally described above, components of the Service Provider that include the integration service system monitor roaming links of the GSM service for roaming mobile devices inbound to the network, track the roamer's activities,  
30 and send the roamer a welcome SMS message that contains an advertisement for the WiFi services. With reference to the flow diagram 300 for advertising WiFi service availability and providing WiFi service information to an inbound roamer (**Figure 3**), this process begins when the Service Provider receives a call and/or a registration transmission from an inbound roaming mobile device, at block 302.



The Service Provider receives registration information of the mobile device via this incoming call, at block 304. The Integration Service System monitors the registration transaction between the Service Provider and the mobile device via roaming tapping, at block 306.

5           Components of the Integration Service System receive identification information from the mobile device as a result of tapping the information transfer between the mobile device and the Service Provider, and store the identification information in at least one database, at block 308. The mobile device identification information includes at least one of a device telephone number, at least one  
10   identification number associated with the mobile device and components of the mobile device, an International Mobile Subscriber Identity (IMSI), a Mobile Country Code (MCC), a Mobile Network Code (MNC), a Mobile Station Identification Number (MSIN), a Mobile Station International Integrated Service Digital Network (ISDN) Number (MSISDN), a Number Assignment Module  
15   (NAM), and information of a subscriber.

          In response to receipt of the identification information, components of the Integration Service System transmit a welcome message to the mobile device via a SMS message. In one embodiment, the tSMSC of the Integration Service System generates and transmits the welcome message. The welcome message advertises  
20   the availability of WiFi services provided by and/or accessed through the Service Provider and provides instructions for accessing the WiFi services, for example, at block 310.

          Once the instructions for accessing the WiFi services are received by the roaming mobile device, the user of the mobile device can use the instructions to  
25   initiate access to the WiFi services. Referring to the flow diagram 400 for providing WiFi service access information to an inbound roamer (Figure 4), a user wishing to access the WiFi services initiates a WiFi service request by dialing a particular number or code received in the SMS message, at block 402. As an example, the user might dial “\*WiFi”. Components of the Integration Service  
30   System receive the WiFi access request call from the mobile device and obtain information of the mobile device including the mobile device telephone number and at least one identification number associated with the mobile and components of the mobile device, at block 404. The central server of the Integration Service System receives the request call in an embodiment, but is not so limited. The

request call is released after the mobile device identification information is obtained.

The components of the Integration Service System, in response to the request call, initiate a WiFi application as appropriate, at block 406. In response to initiation of the WiFi application, a PIN is generated or assigned to the session; the PIN can be generated by at least one of the WiFi application, components of the Service Provider, and components of the Integration Service System, but is not so limited. The mobile device identification information along with the telephone number, the PIN, and an expiration date/time of the PIN are stored in a database, for example the Integration Service System database, at block 408, or in the alternative any other database coupled to at least one of the Integration Service System and the Service Provider. Components of the Integration Service System index information of the database using the mobile device telephone number, at block 410; while this indexing scheme supports re-requests and changes of PINs, alternative embodiments can use other indexing schemes.

Upon generation of the PIN, components of the Integration Service System request delivery of the PIN to the requesting mobile device, at block 412. Components of the Integration Service System read information of the requesting mobile device from the database, where the information includes at least one of the International Mobile Subscriber Identity (IMSI) and the Visited Mobile Switching Center (VMSC), at block 414. Components of the Integration Service System generate the SMS message that includes the PIN, at block 416, and use the information of the database to transmit the SMS message to the requesting mobile device, at block 418.

In an embodiment, the central server of the Integration Service System transmits a request to the tSMSC requesting delivery of the PIN to the requesting mobile device. The tSMSC of the Integration Service System reads the IMSI and the VMSC from the database, generates the SMS message that includes the PIN, and transmits the SMS message to the requesting mobile device.

Upon receipt of the SMS message that includes the PIN and any other information necessary for accessing the WiFi services at the mobile device, a user has the information necessary to initiate access to the WiFi services as appropriate. At such time as the mobile device user wishes to access WiFi service, and with reference to the flow diagram 500 for providing WiFi service to an inbound roamer

(Figure 5), components of the Integration Service System receive mobile device login information via components of the Service Provider, at block 502. The Service Provider transfers information of the login authentication request to components of the Integration Service System, at block 504.

- 5           In an embodiment the user logs in using a user interface provided on one or more Internet access pages of the Service Provider via use of the mobile device telephone number, for example. The components of the Service Provider transfer the login authentication request information to the authentication server of the Integration Service System via messages using HyperText Transmission Protocol  
10 (HTTP)/ HyperText Transmission Protocol, Secure (HTTPS), but alternative embodiments can use alternative protocols.

- Continuing, components of the Integration Service System compare the information of the login authentication request with information of the database, at block 506. Optionally, the Integration Service System determines if the requesting  
15 roamer remains registered with the Service Provider as an additional security measure. Components of the Integration Service System provide WiFi access to the requesting mobile device if the login authentication request information is verified against information of the database, at block 508; otherwise WiFi access is denied.

- 20           Upon initiation of a WiFi session, session records and the corresponding accounting information are generated, under an embodiment. Referring to the flow diagram 600 for providing accounting/billing information of a WiFi session (Figure 6), operation begins when components of the Integration Service System verify login authentication request information and provide WiFi access to the  
25 requesting mobile device, at block 602. Components of the Integration Service System maintain a session login database corresponding to each WiFi session upon initiation of the session, at block 604. The collection of session accounting information is initiated by components of the WiFi provider like the WiFi Subscriber Service Gateway (SSG) with components of the Integration Service  
30 System like the charging server, at block 606, but is not so limited.

The collection of session accounting information or data continues until such time as the user terminates the session. When the user signs off or terminates the session, the Integration Service System receives notification of the termination event from the WiFi provider, at block 608. The Integration Service System then

receives a charging request from the WiFi provider, at block 610. In an embodiment, the Integration Service System charging server receives the charging request from the WiFi SSG via a message using the HTTPS protocol, but is not so limited. The charging request includes a request for information as to at least one  
5 of an amount of usage or a corresponding charge for the session.

In response to receipt of the session termination message, components of the Integration Service System remove the user from the WiFi session login database, at block 612. The Integration Service System then generates a Call  
10 Detail Record (CDR), at block 614, and provides the CDR to the Service Provider, at block 616. The CDR is generated to cover a pre-specified period of time like a day, a pre-specified block of time, or the period of a session. The CDR is used to generate billing information for the user. The CDR can, for example, be provided to the user's cellular telephone service provider for inclusion on the user's cellular telephone bill, thereby eliminating the need for a separate billing invoice.

15 An example is described below using a representative signal flow through a communication system 800 that includes an integration service system 803 for integrating GSM and WiFi services along with a WiFi SSG 802. The example assumes a communication system configuration that provides an inbound roamer or user 801 with an initial session of free access to the WiFi services, where the  
20 initial session has a pre-specified time limit. The user can terminate access to the WiFi services at any time during the initial session. If the initial session remains in progress at the end of the pre-specified time limit, the user receives a message indicating that the initial session has ended and is given an opportunity to continue under a billing option of the user's choice. The communication system continues  
25 to provide access to the WiFi services when the user chooses to continue by selecting a billing option; otherwise access to the WiFi services is terminated.

The example begins with reference to **Figure 7**, which is a signal flow diagram 700 for denial of a WiFi service request, under the embodiment of Figure  
30 1. Operation begins when the user 801 navigates to one or more web pages using the mobile device and provides login authentication information (cellular telephone number and PIN as appropriate) 710 via a user interface. The login authentication information 710 is received at the WiFi SSG 802. The WiFi SSG 802 transfers the login authentication information to integration service system 803 via a message 712 using HTTPS protocol. Components of the Integration Service System 803,

unable to verify the login authentication information, transfer an error message 714 to the WiFi SSG 802 that indicates failure to verify the login authentication information. The WiFi SSG 802 issues a failure notification to the user 801/mobile device in response to the error message and access to WiFi services is denied.

The example continues with reference to **Figure 8A and Figure 8B**, which form a signal flow diagram 800 for providing WiFi services to a mobile device, under the embodiment of Figure 1. Operation begins when the user 801 navigates to one or more web pages using the mobile device and provides login authentication information (cellular telephone number and PIN as appropriate) 810 via a user interface. The login authentication information 810 is received at the WiFi SSG 802. The WiFi SSG 802 transfers the login authentication information to the integration service system 803 via a message 812 using, in one embodiment, HTTPS protocol. Components of the Integration Service System 803, upon verifying the login authentication information, transfer a success message 814 to the WiFi SSG 802 that indicates a successful verification of the login authentication information. The WiFi SSG 802, in response, provides a success message 816 to the user 801 and subsequent access to the WiFi Services by the mobile device for the initial session, and transfers a message 818 to the Integration Service System 803 (using the HTTPS protocol, for example) to initiate collection of the initial session accounting information. The initial session has a pre-specified time period, for example fifteen (15) minutes.

The initial session of WiFi access ends either when a termination message 820 is received at the WiFi SSG 802 from the user 801 or when the WiFi SSG 802 issues a termination message 822 to the user 801 warning about the approaching time limit of the initial session. Regardless of how session termination is initiated, the WiFi SSG 802 transmits a message 824 to the Integration Service System 803 (using the HTTPS protocol, for example) to stop collection of the initial session accounting information.

When the initial session of WiFi access is set to expire, the WiFi SSG 802 receives a message 826 from the user indicating expiration of the pre-specified time. The WiFi SSG 802 in turn transmits a message 828 to the Integration Service System 803 (using the HTTPS protocol, for example) regarding intermediate accounting information. The Integration Service System 803, in

response, transmits a deregistration message to the WiFi SSG 802 which in turn provides a session expiration warning message 832 to the user 801 and initiates a grace period during which the user has time to elect to continue WiFi access.

Upon receipt of a message 834 from the user indicating a desire to terminate the  
5 WiFi session or upon expiration of the grace period with no response received from the user 801, the WiFi SSG 802 terminates the WiFi session and issues a message 836 to the Integration Service System 803 to cease monitoring of the session.

When the user 801 wishes to continue the current WiFi session, the user  
10 initiates a message 838 to the WiFi SSG 802 via the mobile device, as appropriate. The message 838 of an embodiment includes information as to a billing/payment method under which the user will continue the session, but is not so limited. As an example, the message 838 can include information of an election by the user 801 to continue the session and have it billed through at least one of his/her service  
15 provider, a credit card, and at least one pre-paid card. If the user 801 elects to use a credit card or pre-paid card as payment then the information of the message 838 includes at least one of credit card information (card number, expiration date, etc.) and pre-paid card information.

Regardless of the billing/payment method selected, the WiFi SSG 802  
20 receives the message 838 that includes one of an election to bill the continued session through the service provider or the billing/payment information of a credit/pre-paid card. The WiFi SSG 802 transfers information of the received message 838 as appropriate to the integration service system 803 via a message 840 using HTTPS protocol, for example. Components of the Integration Service  
25 System 803, upon verifying one of the registration of the user with the service provider (service provider billing) or verifying the billing/payment information (credit/pre-paid card), generate a success message 842 that indicates a successful registration/verification of the information. The Integration Service System transfers the success message 842 to the WiFi SSG 802. The WiFi SSG 802, in  
30 response to successful receipt of the success message 842, provides a success message 844 to the user 801 and subsequent continued access to the WiFi Services by the mobile device.

When components of the Integration Service System 803 are unable to verify registration of the user with the service provider or the billing/payment

information, the Integration Service System 803 generates and transfers a failure message 846 to the WiFi SSG 802. Continued access to WiFi services by the user 801 are subsequently denied in response to the failure message 846.

5 A system that integrates GSM and WiFi services is provided herein. The system couples among components of two or more communications service providers and roaming mobile communication devices, wherein the system automatically gathers identification information of a mobile device via monitoring communications between a first service provider and the mobile device, launches a service application under a second service provider and provides service  
10 application identification information to the mobile device, and controls access to the service application in response to a request from the mobile device that includes the service application identification information. In an embodiment the first service provider is a Global System for Mobile Communications (GSM) service provider and the second service provider is a Wireless Fidelity (WiFi) service provider.  
15

The system of an embodiment includes a device comprising at least one of: a first system coupled to monitor a first communication channel among service providers and at least one mobile device and receive mobile device identification information; a second system coupled among the first system and a Wireless  
20 Fidelity (WiFi) application, wherein the second system activates the WiFi application in response to a request from the mobile device, generates WiFi application identification information, and transmits the WiFi application identification information to the requesting mobile device; and a third system coupled among the first and second systems to receive an authentication request to  
25 the WiFi application from the mobile device, and controls access of the mobile device to the WiFi application in response to the authentication request.

The device further comprises a messaging system that transmits a first wireless message to the mobile device in response to receipt of the mobile device identification information, wherein the request from the mobile device is an  
30 electronic request for WiFi service access generated by the mobile device using information of the first wireless message.

The second system of the device of an embodiment transmits the WiFi application identification information to the mobile device via a second wireless

message, wherein the WiFi application identification information includes a personal identification number (PIN).

5 The device further comprises at least one database for storage of mobile device identification information that includes at least one of a device telephone number, at least one identification number associated with the mobile device and components of the mobile device, an International Mobile Subscriber Identity (IMSI), and the WiFi application identification information.

10 The mobile device of an embodiment includes at least one of cellular telephones, personal computers, portable computing devices, portable telephones, portable communication devices, subscriber devices or units, and personal digital assistants.

The first communication link of an embodiment includes a cellular communication channel.

15 The service providers of an embodiment include at least one Global System for Mobile Communications (GSM) service provider and at least one Wireless Fidelity (WiFi) wireless local area network (WLAN) service provider.

20 Methods for providing integrated communication services and wireless local area network (WLAN) services to mobile devices are provided herein, comprising at least one of: monitoring wireless channels between a first service provider and a mobile device; receiving device identification information via the monitoring; automatically transmitting a first wireless message to the mobile device in response to receipt of the device identification information; receiving a request for WLAN access from the mobile device; activating at least one WLAN application under a second service provider; automatically transmitting application  
25 identification information to the mobile device; receiving an authentication request to the WLAN application from the mobile device; and controlling access of the mobile device to the WLAN application in response to the authentication request.

The request for WLAN access in an embodiment is generated using information of the first wireless message.

30 The first wireless message of an embodiment includes a Short Message Service (SMS) message.

The method of an embodiment further comprises generating application identification information associated with the WLAN application.



In the method of an embodiment the application identification information is transmitted to the mobile device using a second wireless message. The second wireless message includes a Short Message Service (SMS) message, for example.

In an embodiment the first service provider includes a Global System for  
5 Mobile Communications (GSM) service provider and the second service provider includes a Wireless Fidelity (WiFi) wireless local area network (WLAN) service provider.

The method of an embodiment further comprises storing the device identification information in at least one database, wherein the device identification  
10 information includes at least one of a device telephone number, at least one identification number associated with the mobile device and components of the mobile device, an International Mobile Subscriber Identity (IMSI), a Mobile Country Code (MCC), a Mobile Network Code (MNC), a Mobile Station Identification Number (MSIN), a Mobile Station International Integrated Service  
15 Digital Network (ISDN) Number (MSISDN), a Number Assignment Module (NAM), information of a subscriber, and the WiFi application identification information.

The mobile device of an embodiment includes at least one of cellular telephones, personal computers, portable computing devices, portable telephones,  
20 portable communication devices, subscriber devices or units, and personal digital assistants.

The mobile device of an embodiment includes cellular telephones having a single Subscriber Identity Module (SIM)/User Identity Module (UIM) card.

The method of an embodiment further comprises generating a call detail  
25 record during at least one time period during which the mobile device is accessing the WLAN application.

The method of an embodiment further comprises providing billing information to at least one billing system via a coupling to the billing system, wherein the billing information comprises information of at least one session  
30 during which the mobile device is accessing the WLAN application.

A system that couples among components of two or more communications service providers and roaming mobile communication devices is provided herein, comprising at least one of: means for monitoring communications between a first service provider and a mobile device; means for automatically gathering

identification information of the mobile device; means for launching a service application under a second service provider and providing service application identification information to the mobile device; and means for controlling access to the service application in response to a request from the mobile device that  
5 includes the service application identification information.

A system that integrates GSM and WiFi services is provided herein. The system includes a device that integrates access to communication services and wireless local area network (WLAN) services by mobile devices, comprising at least one of: means for monitoring wireless channels between a first service  
10 provider and a mobile device; means for receiving device identification information of the mobile device via the monitoring; means for automatically transmitting a first wireless message to the mobile device in response to receipt of the device identification information; means for receiving a request for WLAN access from the mobile device; means for activating at least one WLAN  
15 application under a second service provider; means for automatically transmitting application identification information to the mobile device; means for receiving an authentication request to the WLAN application from the mobile device; and means for controlling access of the mobile device to the WLAN application in response to the authentication request.

20 A computer readable medium is provided herein including executable instructions which, when executed by a processing system, provides integrated communication services and wireless local area network (WLAN) services to mobile devices, by monitoring wireless channels between a first service provider and a mobile device, receiving device identification information via the  
25 monitoring, automatically transmitting a first wireless message to the mobile device in response to receipt of the device identification information, receiving a request for WLAN access from the mobile device, activating at least one WLAN application under a second service provider, automatically transmitting application identification information to the mobile device, receiving an authentication request  
30 to the WLAN application from the mobile device, and controlling access of the mobile device to the WLAN application in response to the authentication request.

Aspects of the integration service system described herein may be implemented as functionality programmed into any of a variety of circuitry, including programmable logic devices (PLDs), such as field programmable gate

arrays (FPGAs), programmable array logic (PAL) devices, electrically programmable logic and memory devices and standard cell-based devices, as well as application specific integrated circuits (ASICs). Some other possibilities for implementing aspects of the integration service system include: microcontrollers with memory (such as electronically erasable programmable read only memory (EEPROM)), embedded microprocessors, firmware, software, etc. Furthermore, aspects of the integration service system may be embodied in microprocessors having software-based circuit emulation, discrete logic (sequential and combinatorial), custom devices, fuzzy (neural) logic, quantum devices, and hybrids of any of the above device types. Of course the underlying device technologies may be provided in a variety of component types, e.g., metal-oxide semiconductor field-effect transistor (MOSFET) technologies like complementary metal-oxide semiconductor (CMOS), bipolar technologies like emitter-coupled logic (ECL), polymer technologies (e.g., silicon-conjugated polymer and metal-conjugated polymer-metal structures), mixed analog and digital, etc.

Unless the context clearly requires otherwise, throughout the description and the claims, the words "comprise," "comprising," and the like are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in a sense of "including, but not limited to." Words using the singular or plural number also include the plural or singular number respectively. Additionally, the words "herein," "hereunder," "above," "below," and words of similar import shall refer to this application as a whole and not to any particular portions of this application. When the word "or" is used in reference to a list of two or more items, that word covers all of the following interpretations of the word: any of the items in the list, all of the items in the list and any combination of the items in the list.

The above description of embodiments of the integration service system is not intended to be exhaustive or to limit the system to the precise form disclosed. While specific embodiments of, and examples for, the integration service system are described herein for illustrative purposes, various equivalent modifications are possible within the scope of the system, as those skilled in the relevant art will recognize. The teachings of the integration service system provided herein can be applied to other processing systems and communication systems, not only for the systems described above.

The elements and acts of the various embodiments described above can be combined to provide further embodiments. These and other changes can be made to the system for maintaining electronic files in light of the above detailed description.

5 All of the above references and United States patents and patent applications are incorporated herein by reference. Aspects of the integration service system can be modified, if necessary, to employ the systems, functions and concepts of the various patents and applications described above to provide yet further embodiments of the system.

10 In general, in the following claims, the terms used should not be construed to limit the integration service system to the specific embodiments disclosed in the specification and the claims, but should be construed to include all processing systems that operate under the claims to provide integrated services, like GSM and WiFi. Accordingly, the integration service system is not limited by the disclosure,  
15 but instead the scope of the system is to be determined entirely by the claims.

While certain aspects of the integration service system are presented below in certain claim forms, the inventor contemplates the various aspects of the system in any number of claim forms. For example, while only one aspect of the system is recited as embodied in computer-readable medium, other aspects may likewise be  
20 embodied in computer-readable medium. Accordingly, the inventor reserves the right to add additional claims after filing the application to pursue such additional claim forms for other aspects of the integration service system.

**CLAIMS**

What I claim is:

- 1    1.     A device comprising:  
2            a first system coupled to monitor a first communication channel among  
3    service providers and at least one mobile device and receive mobile device  
4    identification information;  
5            a second system coupled among the first system and a Wireless Fidelity  
6    (WiFi) application, wherein the second system activates the WiFi application in  
7    response to a request from the mobile device, generates WiFi application  
8    identification information, and transmits the WiFi application identification  
9    information to the requesting mobile device; and  
10           a third system coupled among the first and second systems that receives an  
11    authentication request to the WiFi application from the mobile device, and controls  
12    access of the mobile device to the WiFi application in response to the  
13    authentication request.
  
- 1    2.     The device of claim 1, further comprising a messaging system that  
2    transmits a first wireless message to the mobile device in response to receipt of the  
3    mobile device identification information, wherein the request from the mobile  
4    device is an electronic request for WiFi service access generated by the mobile  
5    device using information of the first wireless message.
  
- 1    3.     The device of claim 1, wherein the second system transmits the WiFi  
2    application identification information to the mobile device via a second wireless  
3    message, wherein the WiFi application identification information includes a  
4    personal identification number (PIN).
  
- 1    4.     The device of claim 1, further comprising at least one database for storage  
2    of mobile device identification information that includes at least one of a device  
3    telephone number, at least one identification number associated with the mobile  
4    device and components of the mobile device, an International Mobile Subscriber  
5    Identity (IMSI), and the WiFi application identification information.

1 5. The device of claim 1, wherein the mobile device includes at least one of  
2 cellular telephones, personal computers, portable computing devices, portable  
3 telephones, portable communication devices, subscriber devices or units, and  
4 personal digital assistants.

1 6. The device of claim 1, wherein the first communication link includes a  
2 cellular communication channel.

1 7. The device of claim 1, wherein the service providers include at least one  
2 Global System for Mobile Communications (GSM) service provider and at least  
3 one Wireless Fidelity (WiFi) wireless local area network (WLAN) service  
4 provider.

1 8. A system that couples among components of two or more communications  
2 service providers and roaming mobile communication devices, wherein the system  
3 automatically gathers identification information of a mobile device via monitoring  
4 communications between a first service provider and the mobile device, launches a  
5 service application under a second service provider and provides service  
6 application identification information to the mobile device, and controls access to  
7 the service application in response to a request from the mobile device that  
8 includes the service application identification information.

1 9. The system of claim 8, wherein the first service provider is a Global  
2 System for Mobile Communications (GSM) service provider and the second  
3 service provider is a Wireless Fidelity (WiFi) service provider.

1 10. A method for providing integrated communication services and wireless  
2 local area network (WLAN) services to mobile devices, comprising:  
3 monitoring wireless channels between a first service provider and a mobile  
4 device;  
5 receiving device identification information via the monitoring;  
6 automatically transmitting a first wireless message to the mobile device in  
7 response to receipt of the device identification information;  
8 receiving a request for WLAN access from the mobile device;

9           activating at least one WLAN application under a second service provider;  
10           automatically transmitting application identification information to the  
11 mobile device;  
12           receiving an authentication request to the WLAN application from the  
13 mobile device; and  
14           controlling access of the mobile device to the WLAN application in  
15 response to the authentication request.

1   11.    The method of claim 10, wherein the request for WLAN access is  
2 generated using information of the first wireless message.

1   12.    The method of claim 10, wherein the first wireless message includes a  
2 Short Message Service (SMS) message.

1   13.    The method of claim 10, further comprising generating application  
2 identification information associated with the WLAN application.

1   14.    The method of claim 10, wherein the application identification information  
2 is transmitted to the mobile device using a second wireless message.

1   15.    The method of claim 14, wherein the second wireless message includes a  
2 Short Message Service (SMS) message.

1   16.    The method of claim 10, wherein the first service provider includes a  
2 Global System for Mobile Communications (GSM) service provider and the  
3 second service provider includes a Wireless Fidelity (WiFi) wireless local area  
4 network (WLAN) service provider.

1   17.    The method of claim 10, further comprising storing the device  
2 identification information in at least one database, wherein the device identification  
3 information includes at least one of a device telephone number, at least one  
4 identification number associated with the mobile device and components of the  
5 mobile device, an International Mobile Subscriber Identity (IMSI), a Mobile  
6 Country Code (MCC), a Mobile Network Code (MNC), a Mobile Station

7 Identification Number (MSIN), a Mobile Station International Integrated Service  
8 Digital Network (ISDN) Number (MSISDN), a Number Assignment Module  
9 (NAM), information of a subscriber, and the WiFi application identification  
10 information.

1 18. The method of claim 10, wherein the mobile device includes at least one of  
2 cellular telephones, personal computers, portable computing devices, portable  
3 telephones, portable communication devices, subscriber devices or units, and  
4 personal digital assistants.

1 19. The method of claim 10, wherein the mobile device includes cellular  
2 telephones having a single Subscriber Identity Module (SIM)/User Identity Module  
3 (UIM) card.

1 20. The method of claim 10, further comprising generating a call detail record  
2 during at least one time period during which the mobile device is accessing the  
3 WLAN application.

1 21. The method of claim 10, further comprising providing billing information  
2 to at least one billing system via a coupling to the billing system, wherein the  
3 billing information comprises information of at least one session during which the  
4 mobile device is accessing the WLAN application.

1 22. A system that couples among components of two or more communications  
2 service providers and roaming mobile communication devices, comprising:  
3 means for monitoring communications between a first service provider and  
4 a mobile device;  
5 means for automatically gathering identification information of the mobile  
6 device;  
7 means for launching a service application under a second service provider  
8 and providing service application identification information to the mobile device;  
9 and



10 means for controlling access to the service application in response to a  
11 request from the mobile device that includes the service application identification  
12 information.

1 23. A device that integrates access to communication services and wireless  
2 local area network (WLAN) services by mobile devices, comprising:  
3 means for monitoring wireless channels between a first service provider  
4 and a mobile device;  
5 means for receiving device identification information of the mobile device  
6 via the monitoring;  
7 means for automatically transmitting a first wireless message to the mobile  
8 device in response to receipt of the device identification information;  
9 means for receiving a request for WLAN access from the mobile device;  
10 means for activating at least one WLAN application under a second service  
11 provider;  
12 means for automatically transmitting application identification information  
13 to the mobile device;  
14 means for receiving an authentication request to the WLAN application  
15 from the mobile device; and  
16 means for controlling access of the mobile device to the WLAN application  
17 in response to the authentication request.

1 24. A computer readable medium including executable instructions which,  
2 when executed by a processing system, provides integrated communication  
3 services and wireless local area network (WLAN) services to mobile devices, by:  
4 monitoring wireless channels between a first service provider and a mobile  
5 device;  
6 receiving device identification information via the monitoring;  
7 automatically transmitting a first wireless message to the mobile device in  
8 response to receipt of the device identification information;  
9 receiving a request for WLAN access from the mobile device;  
10 activating at least one WLAN application under a second service provider;  
11 automatically transmitting application identification information to the  
12 mobile device;

- 13           receiving an authentication request to the WLAN application from the
- 14   mobile device; and
- 15           controlling access of the mobile device to the WLAN application in
- 16   response to the authentication request.

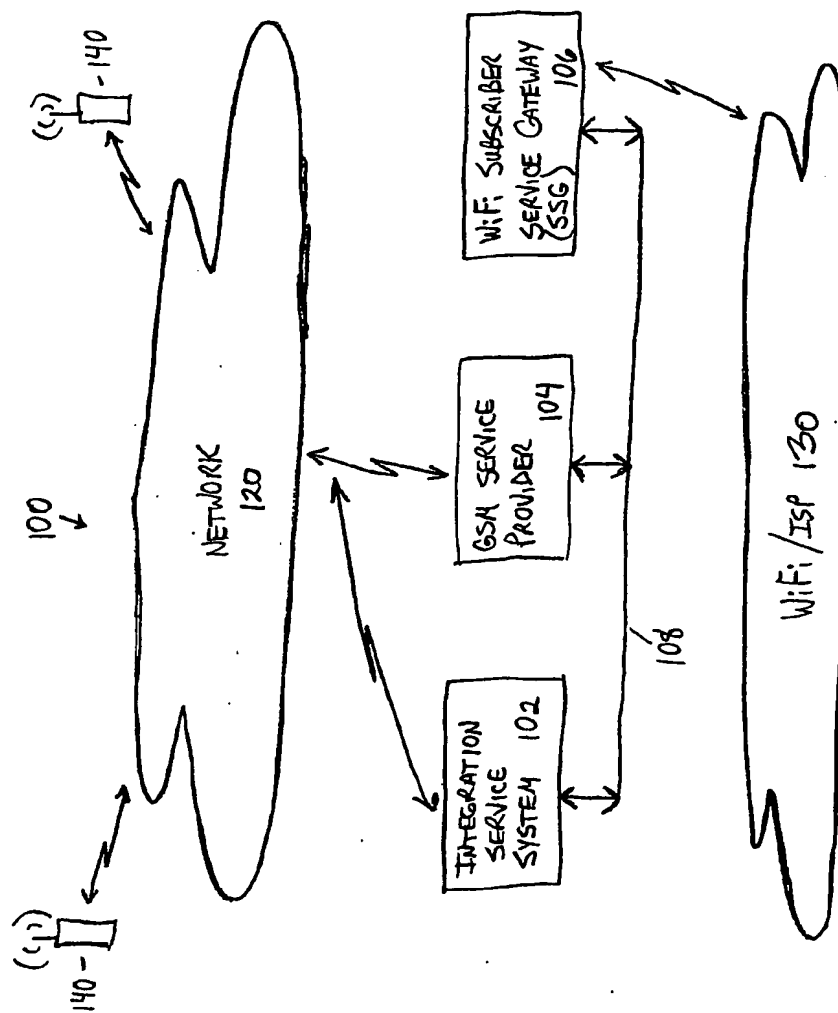


FIGURE 1




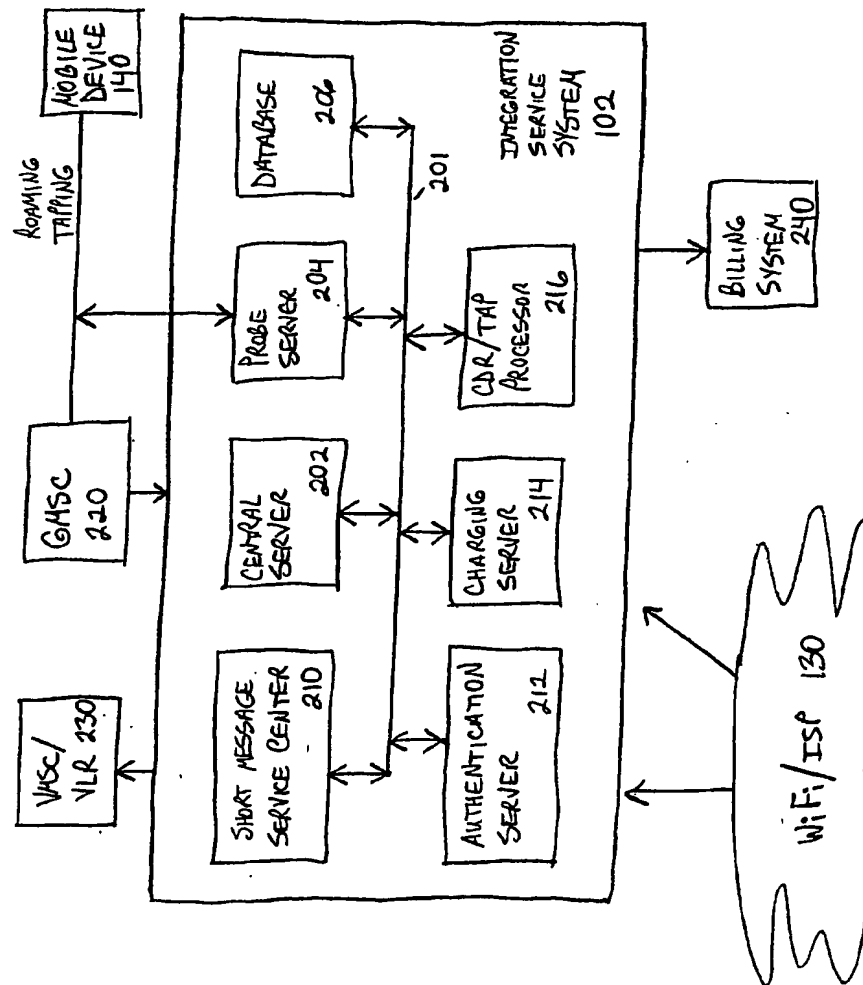



FIGURE 2

**Figure 3**


**Figure 4**

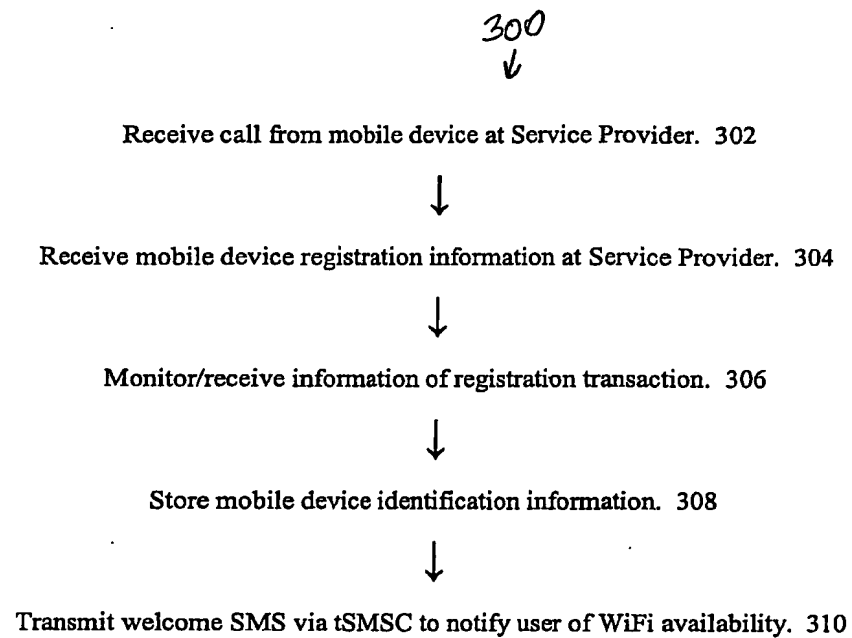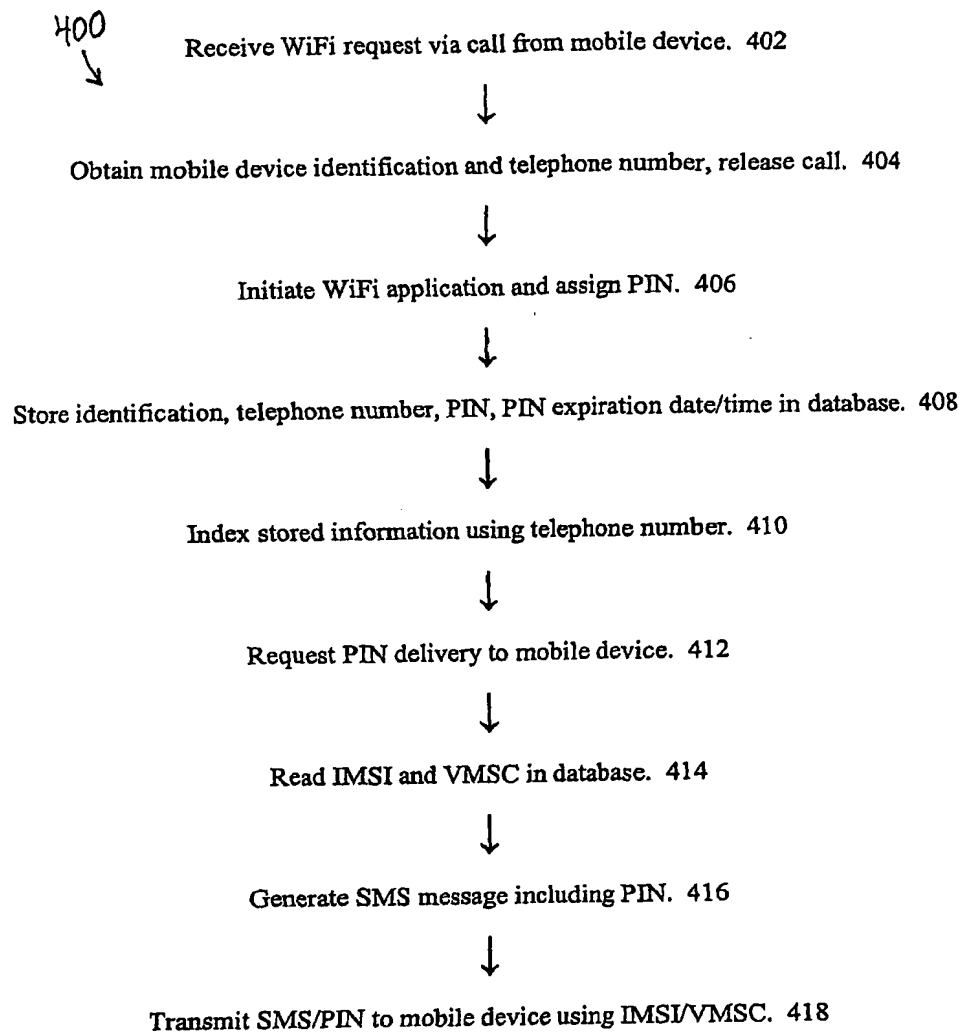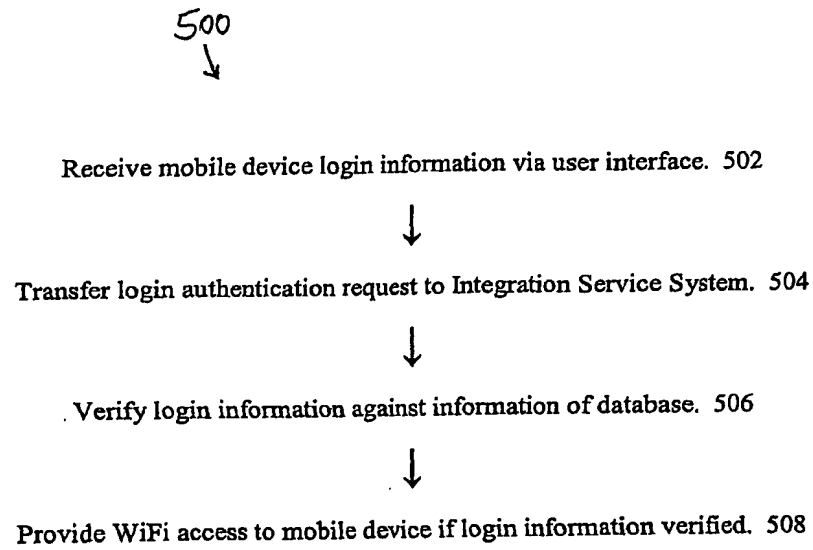

**Figure 5**

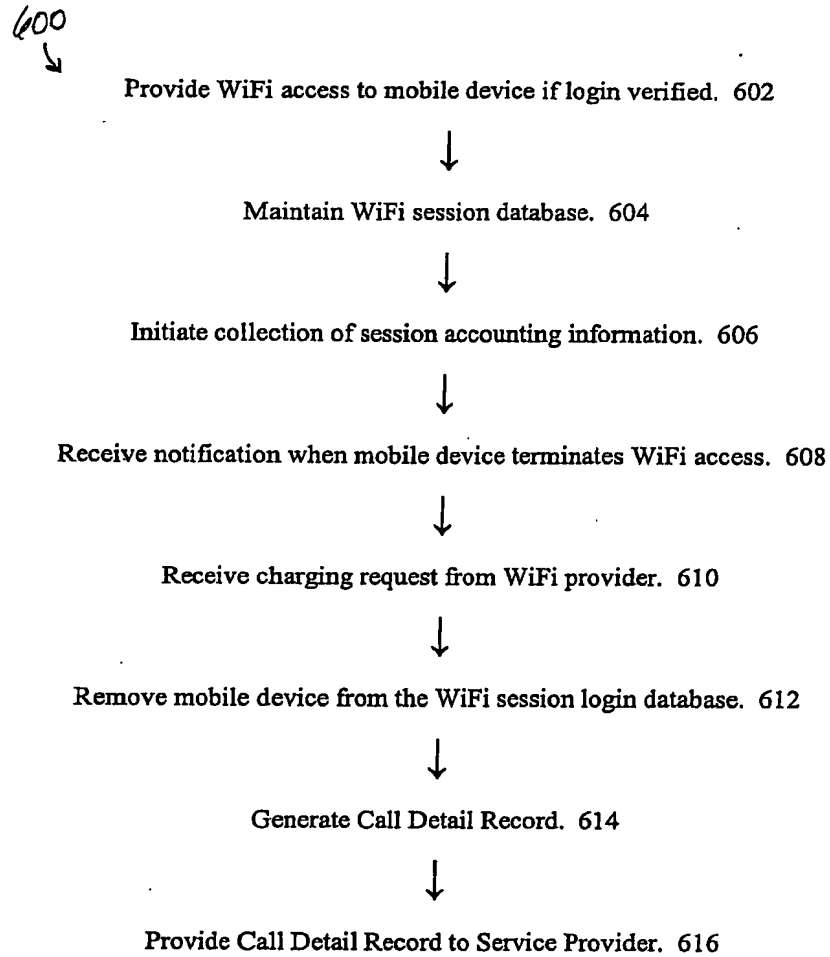**Figure 6**

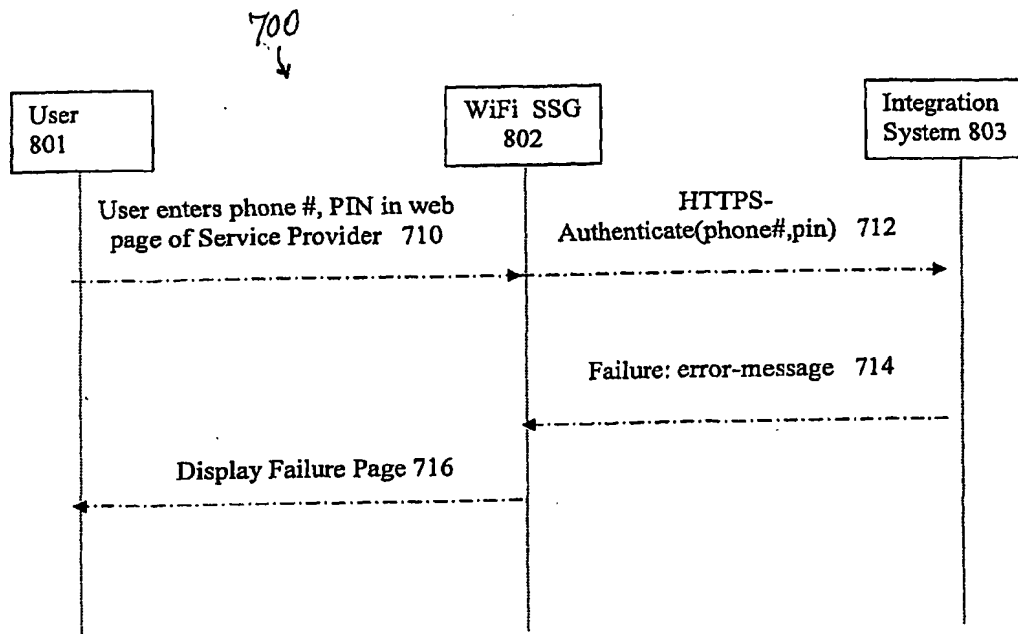

**Figure 7**


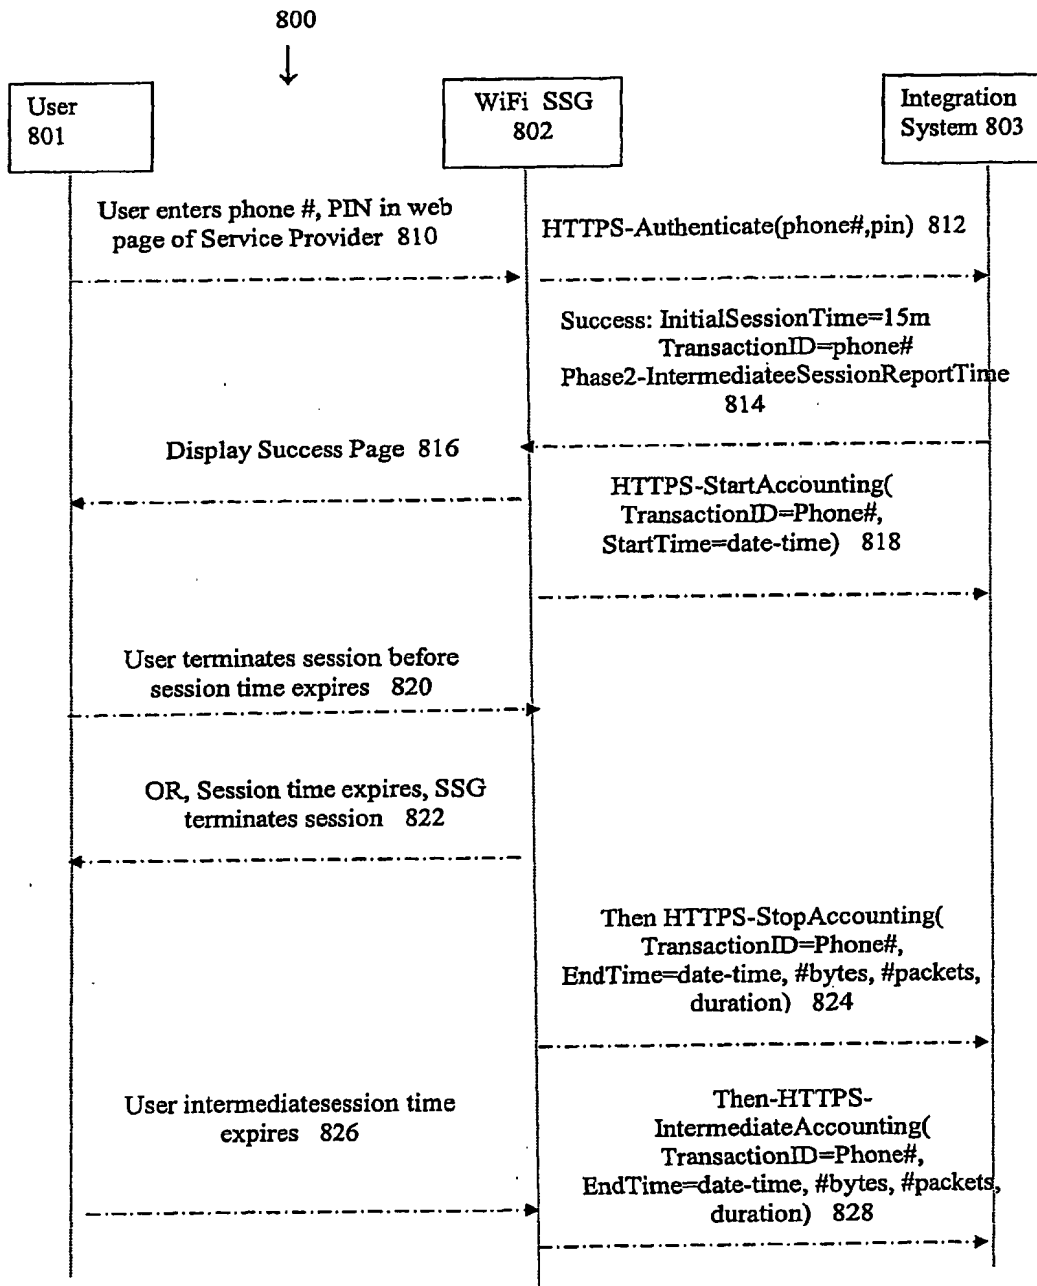


Figure 8A

**Figure 8B**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau

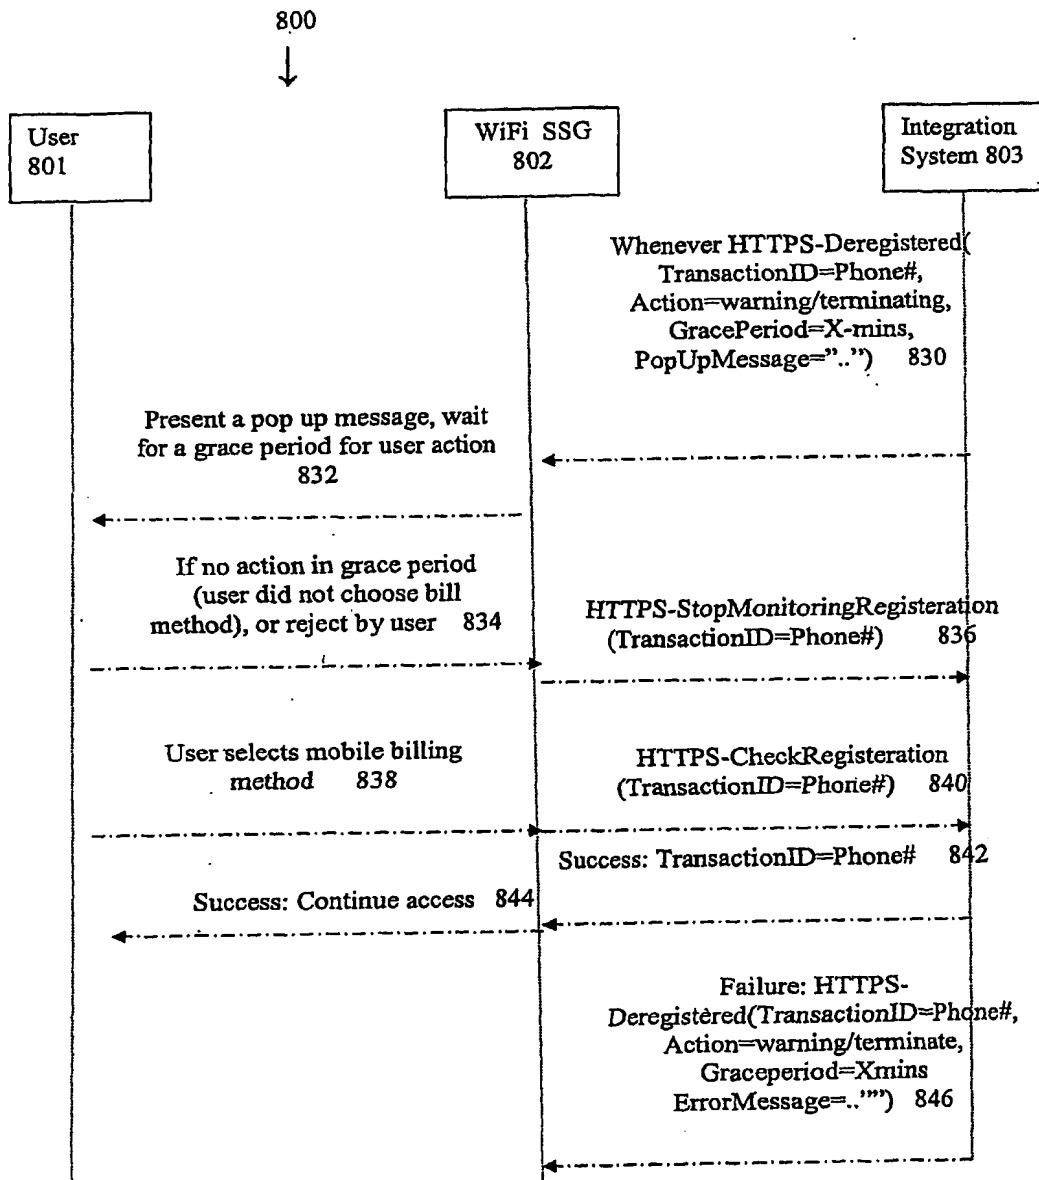

(43) International Publication Date  
2 September 2004 (02.09.2004)

PCT

(10) International Publication Number  
**WO 2004/075484 A3**

(51) International Patent Classification<sup>7</sup>: **H04L 12/28**  
(21) International Application Number:  
PCT/US2004/004318

(22) International Filing Date: 13 February 2004 (13.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/448,000 18 February 2003 (18.02.2003) US

(71) Applicant (for all designated States except US):  
**ROAMWARE, INC.** [US/US]; 18900 Stevens Creek  
Blvd., Suite 100, Cupertino, CA 95014-3674 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JIANG, Yue, Jun**  
[GB/US]; 4414 Sugar Maple Drive, Danville, CA 94506  
(US).

(74) Agents: **COURTNEY, Barbara, B.** et al.; Shemwell Gre-  
gory & Courtney LLP, 4880 Stevens Creek Blvd., Suite  
201, San Jose, CA 95129 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

[Continued on next page]

(54) Title: INTEGRATING GSM AND WIFI SERVICE IN MOBILE COMMUNICATION DEVICES

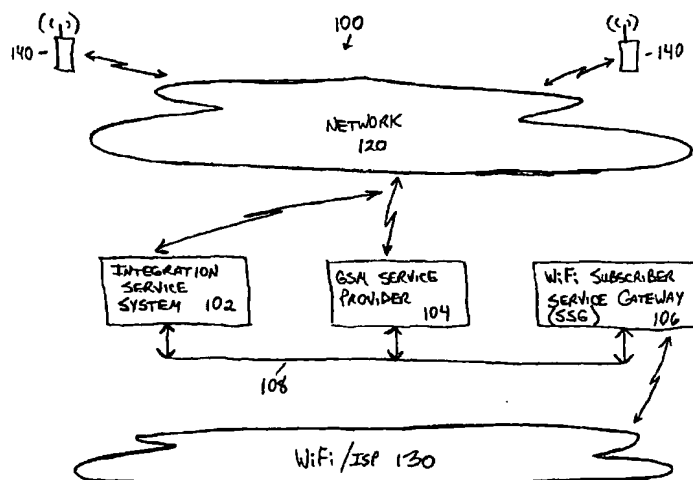

(57) Abstract: A system that integrates Global System for Mobile Communications (GSM) and Wireless Fidelity (WiFi) wireless local area network (WLAN) services is provided. The system couples among components of a communications service provider and a provider of WiFi services to provide integrated cellular communications and wireless fidelity network services to users of mobile devices. The system monitors communications between the service provider and the mobile devices and automatically gathers identification information of the mobile devices. Upon authentication of the mobile devices via an exchange of information among the service provider infrastructures and the mobile devices, the system controls access of the mobile communication devices to WiFi services via the service provider infrastructure using the identification information.

WO 2004/075484 A3



**(88) Date of publication of the international search report:**  
30 September 2004

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US2004/004318

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04L H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ALA-LAURILA J ET AL: "WIRELESS LAN ACCESS NETWORK ARCHITECTURE FOR MOBILE OPERATORS" November 2001 (2001-11), IEEE COMMUNICATIONS MAGAZINE, IEEE SERVICE CENTER, PISCATAWAY, N.J, US, PAGE(S) 82-89 , XP001107810 ISSN: 0163-6804 the whole document	1-24
A	BRUENEN M: "ROAMING IM ZUGANGSNETZ MIT OWLAN UEBERALL ZU HAUSE SEIN" 2002, NET - ZEITSCHRIFT FUER KOMMUNIKATIONS MANAGEMENT, HUTHIG VERLAG, HEILDERBERG, DE, PAGE(S) 39-42 , XP001122438 ISSN: 0947-4765 page 39 - page 40	1-24

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

2 August 2004

Date of mailing of the international search report

09/08/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Müller, N

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US2004/004318

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	OSTROWSKI F: "ROAMING UND HANDOVER ZWISCHEN UMTS UNK FUNK-LAN" 2002, NTZ (NACHRICHTENTECHNISCHE ZEITSCHRIFT), VDE VERLAG GMBH. BERLIN, DE, PAGE(S) 24-26 , XP001124094 ISSN: 0027-707X page 25, column 2 - page 26, column 1 -----	1-24
A	SALKINTZIS A K ET AL: "WLAN-GPRS INTEGRATION FOR NEXT-GENERATION MOBILE DATA NETWORKS" October 2002 (2002-10), IEEE WIRELESS COMMUNICATIONS, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, PAGE(S) 112-123 , XP001132263 ISSN: 1070-9916 page 119, right-hand column - page 121, right-hand column -----	1-24
A	US 2002/191575 A1 (KALAVADE ASAWAREE ET AL) 19 December 2002 (2002-12-19) page 1, paragraph 13 - page 2, paragraph 15 page 3, paragraph 40 - paragraph 41 page 4, paragraph 58 page 4, paragraph 65 - page 6, paragraph 82 -----	1-24

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/US2004/004318

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002191575 A1	19-12-2002	CA 2450434 A1	27-12-2002
		EP 1405475 A1	07-04-2004
		WO 02103970 A1	27-12-2002
<hr/>			